

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 674 405 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.10.1998 Bulletin 1998/43

(51) Int Cl.⁶: **H04H 9/00**

(21) Application number: **94309919.2**

(22) Date of filing: **30.12.1994**

(54) Method for surveying a radio or a television audience

Verfahren zur Einschaltquotenschätzung für Rundfunk- oder Fernsehprogramme

Méthode d'estimation de l'audience de programmes radio ou de télévision

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **21.03.1994 US 215176**

(43) Date of publication of application:
27.09.1995 Bulletin 1995/39

(73) Proprietor: **Weinblatt, Lee S.**
Teaneck New Jersey 07666 (US)

(72) Inventor: **Weinblatt, Lee S.**
Teaneck New Jersey 07666 (US)

(74) Representative:
Beresford, Keith Denis Lewis et al
BERESFORD & Co.
2-5 Warwick Court
High Holborn
London WC1R 5DJ (GB)

(56) References cited:
EP-A- 0 347 401 **FR-A- 2 626 731**
US-A- 3 845 391 **US-A- 4 750 034**

EP 0 674 405 B1

BEST AVAILABLE COPY

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

This invention is directed to a surveying technique for determining whether a monitored individual carrying a monitoring device is tuned to a given signal source such as a television channel or radio station and, in particular, to the transmission of a survey signal combined with a programming signal which are applied at the receiver so as to produce signals in the audible frequency range with a speaker, the survey signal being converted at the receiver to a non-acoustic signal that is transmitted for detection by the monitoring device to thereby identify the signal source to which the individual is tuned.

It is important for a number of reasons to survey an audience to determine to what extent each of its members is tuned at any given time to a particular source of programming (referred to herein as a "signal source") such as a television ("TV") channel or radio station, including the capability to identify even a specific program and/or a specific advertisement. The use herein of the term TV channel or radio station is to be understood as referring to all signal sources. Advertisers are, of course, interested in knowing the number of people exposed to their commercials and to identify their listeners by economic and social categories. Broadcasters use statistics on audience size and type for setting their advertising rates.

Prior art techniques for obtaining such information involve primarily the following approaches. People within the range of the radio station or who receive a television channel (either over the air or by cable) are contacted by phone and interviewed regarding their listening habits. Each person is questioned about the signal sources which that individual listened to during the previous, say, twenty-four hours. However, this technique is suspect because it is subject to recall errors as well as possible bias introduced by the interviewer. For example, if a specific signal source is mentioned to the person being interviewed, the suggestion may elicit a positive response to a question regarding whether that signal source was viewed even when it actually did not occur. Another technique involves keeping diaries by persons agreeing to act as test subjects. Diary entries are to be made manually throughout the day to keep track of what signal sources are being listened to. The diaries are collected periodically and analyzed. However, this approach is prone to inaccuracies because the test subjects may fail to make entries due to forgetfulness or laziness, or wrong entries can be made due to tardiness in attending to this task. Thus, it can be readily seen that the recall-dependent approach first described above is unsatisfactory because people may not accurately remember what they listened to at any particular time and, also, because of the potential problem of suggestive bias. The diary-based approach is likewise unsatisfactory because people may not cooperate and be as meticulous in making timely diary entries as required to obtain the desired record-keeping accuracy.

The above-described techniques all require a significant and time-consuming effort on the part of the test participants to record their TV viewing and/or radio listening habits. Other techniques are known in which the test participants need only play a passive role. For example, it is known to utilize a survey signal transmitted in combination with a programming signal for producing survey signals in the audible range. As disclosed in USP 4,718,106, the periodically transmitted survey signal is detected by a receiver and reproduced audibly by a speaker in the form of an audible signal, or code. It is "audible" by virtue of being in what is known as the audible frequency range of human hearing. More specifically, the speaker produces pressure waves in the air that can be detected by a microphone, for example, and with a frequency that is in what is scientifically regarded as the audible range of human hearing. Such pressure waves, or signals, are sometimes referred to herein as acoustic. An acoustic wave is regarded as being audible irrespective of whether it is actually heard by a person, as long as it can be produced by a conventional speaker and detected by a conventional microphone. The audible acoustic signal is detected by a portable device worn by the monitored individual, and data on the incidence of occurrence and/or the time of occurrence are stored and analyzed.

The survey signal can be transmitted at a point in time assigned to it alone, i.e. during a gap in the programming signal. This could be done at predetermined regular intervals, when the program has a natural break in it, or when it ends. Alternatively, the survey signal can be transmitted simultaneously with the programming signal. For example, as disclosed in USSN 08/003,325 filed January 12, 1993, a notch filter can remove a narrow band of frequencies from the programming signal, and this band is devoted to the survey signal. Corresponding filtering is then carried out by the receiver. This applies to analog signals. However, the programming and survey signals can likewise be digital. The nature of the survey signal can be such as to be heard by the monitored individual as, for example, a multi-note musical tone, or an effort can be made to lower the volume and/or transmit at the extremes of the audible frequency range so as to avoid as much as possible its being heard.

Use of the speaker to reproduce the survey signal is highly useful in many respects. However, the necessity to reproduce the transmitted survey signal audibly for pick-up by a microphone is also a possible drawback of this technique because, if heard by the listener, the sound can tend to be disturbing depending on volume, frequency of occurrence and content. In order to provide meaningful survey results, an interval of, for example, ten minutes can be set between survey signals. For some purposes, such as to take into account frequent switching among channels, for example, an interval of a minute or less may be needed. This can cause a chopping or interruption of, for example, a musical program

at an inappropriate point, and some people can become annoyed just by virtue of this code being repeatedly reproduced within their hearing.

A further complicating factor is that a minimal survey signal amplitude is required in order for the portable monitoring device to be able to pick up the survey signal produced by the speaker. However, what this amplitude must be depends on the distance of the monitored individual from the speaker. If there are several TV sets in the house, due to differences in seating arrangements which normally vary from room to room, the distance between the monitored individual and the TV set is not a constant number. It is difficult to set the amplitude even within a given room, if a number of individuals are being monitored in the same household, as is common, because different seats are used by the individuals which can vary significantly in distance from the TV set, for example, depending on room size. Thus, the amplitude of the survey signal adjusted based on this factor to be minimal, yet detectable, for one room or individual would not work for all possible situations and arrangements. Therefore, at least some of the monitored individuals may hear the audible survey signal if, for example, the amplitude is set for distance X while they sit at X/2.

In view of the above, it is preferable to avoid use of a survey signal which might be discerned by the monitored individual. However, government regulations in some countries may require that signals for commercial radios, for example, must be limited to the audible range. In fact, even though speakers which are now available can reproduce frequencies beyond the audible range of a human being, nevertheless the usable transmission frequencies permitted by government regulations are limited to the audible range because of the need for compatibility with older, lower quality speakers. Thus, there exists a conflict between the respective requirements at the transmission end and the receiving end. At the transmission end, there is the need to transmit a survey signal in the audible frequency range, while at the receiving end it is preferable to reproduce the survey signal so as not to disturb the monitored individuals.

Although the technique disclosed in USP 4,718,106 is highly useful in terms of carrying out passive monitoring, it has several additional shortcomings. For example, it cannot monitor signal sources that are listened to on a Walkman type of device, which relies on headphones and has no speaker, or with headphones plugged into a radio or TV set which cut-out the speaker because in either case an acoustic signal is not projected far enough to be detected by the device worn by the monitored individual. Also, the technique disclosed in that patent is vulnerable to fraud because false readings can be created in the device if, for example, someone were to set up a bogus signal source emitting a monitoring signal of interest (say for a particular TV program) in a shopping mall. All consumers wearing the monitoring device who happen to be merely shopping in the mall would then register the monitoring signal, and be record-

ed as viewers, even though they obviously are not.

One object of the present invention is to provide an improved audience survey technique utilizing a transmitted survey signal which is used to identify the signal source to which a monitored individual is tuned.

It is another object of the present invention to transmit a survey signal in the audible range to be reproduced at the receiver by a speaker but to reproduce it as a signal which is non-intrusive to the monitored individual.

A further object of the present invention is to provide data security to information collected with an audience surveying technique to prevent fraud.

Yet another object of the present invention is to survey an audience even with monitored individuals who are using headphones.

According to a first aspect of the present invention there is provided a receiver unit for use in a system for surveying an audience to determine whether a person is tuned to a given signal source such as a radio station or television channel, arranged to transmit a combined signal that combines both a programming signal and a survey signal characteristic of said signal source, said programming signal and said survey signal being in a frequency range to be audibly reproduced by a speaker in a receiver unit, the receiver unit comprising receiving means for receiving the combined signal and including a speaker for reproducing therefrom the survey signal as an acoustic signal, the receiver unit being characterised in that said acoustic signal is such that it cannot be heard at an appreciable distance from the speaker, and further comprising conversion means for converting said acoustic survey signal produced by said speaker to a non-acoustic converted signal, means for transmitting said converted signal to a signal detector means, and said signal detector means being effective to detect said transmitted converted signal.

According to a second aspect of the present invention there is provided a method for surveying an audience to determine whether a person is tuned to a given signal source, such as radio station or television channel, which is transmitting a combined signal that combines both a programming signal and a survey signal characteristic of said signal source, said programming signal and said survey signal being in a frequency range to be audibly reproduced by a speaker in a receiver unit, the method comprising the steps of receiving the combined signal and reproducing therefrom the survey signal as an acoustic signal with a speaker, the method being characterized by the acoustic signal being such that it cannot be heard at an appreciable distance from the speaker, and by including the further steps of converting said acoustic survey signal produced by said speaker to a non-acoustic converted signal, transmitting said converted signal, and detecting said transmitted converted signal.

According to a third aspect of the present invention there is provided a receiver unit for use in a system for surveying an audience to determine whether a person

listening with headphones is tuned to a given signal source such as a radio station or a television channel, which is arranged to transmit a combined signal combining programming signal along with a survey signal characteristic of the signal source, the programming signal and the survey signal being in a frequency range to be audibly reproduced by a speaker and/or headphones coupled to a receiver, the receiver unit comprising receiving means for receiving said transmitted combined signal and providing the combined signal at a jack for input to the headphones, the receiver unit being characterized in including a conversion unit having a jack and a plug, said plug being received in the jack of the receiving means, and said plug of the conversion unit being adapted to receive a plug of the headphones, wherein said conversion unit includes means for reproducing said survey signal from said combined signal to generate an output signal, means for transmitting a signal corresponding to said output signal, and means for detecting said transmitted signal.

A number of embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a block diagram of a circuit in accordance with a first embodiment of the invention.

Fig. 2 is a block diagram of a circuit designed to operate in accordance with a second embodiment of the invention to monitor individuals listening to a program with headphones.

To conduct the survey, persons are selected by the surveying organization based on certain criteria. These criteria can be, for example, age, income, geographic location, sex, and level of education. The broadcasting organization and/or advertisers may require an analysis of their listeners which is broken down into one or more of these categories. The individuals who are approached to be test subjects are merely asked to participate in a test the details of which are not explained. Each person is told only that a requirement of the test is the wearing of a certain article of clothing. Additional information is preferably not supplied in order to avoid predisposing or prejudicing the individual test subject toward or away from the aims of the survey. For example, if the individual were told that the survey relates to a radio survey, then this might result in more time and attention being paid to radio listening than would be normal for that person. Even worse would be the situation were the individual informed of the particular radio station involved in the survey. In order to avoid this problem, each individual is given an article of clothing to wear on a regular basis. For example, such an article of clothing might be a watch for men or a bracelet for women.

Fig. 1 depicts in block form a signal source 1 for emitting frequency signals at one of the frequencies to which radios are tunable on either the AM or FM band or on which television channels transmit. In both cases, the frequencies used are in the range for producing at the receiving end audible signals normally to be convert-

ed by a speaker into acoustic signals in the form of pressure waves traveling through the air. Signal source 1 includes a programming signal generator 3 and a survey signal generator 5. Generator 3 can include a microphone picking up a live performance or a tape of some pre-recorded program. Generator 5 is likely to be a taped coded signal and, for example, it can be operated on a timer with a preset interval between playbacks or it can be operated with a switch selectively actuated manually. The outputs of generators 3 and 5 are added in combining circuit 7, and then provided to transmitter 9. As explained above, generators 3 and 5 can produce analog or digital signals and the programming signal and survey signal can overlap in time or they can occur at times distinct from each other. Also, the survey signal can be transmitted in relation to only a specific program or a specific commercial, that being the signal source, rather than the radio station or TV channel as such. Details of all such elements 3, 5, 7 and 9 are well known in the art. Accordingly, it is not deemed necessary to provide the circuit and structural specifics of this transmitting means nor any other such details connected with a signal source, except as follows.

Generator 5 produces a coded survey signal utilized for a purpose to be described below in greater detail. Suffice it to say at this point that generator 5 produces a modulating signal transmitted on the carrier airwave emitted by transmitter 9 so as to be detectable by a receiver which is tuned to the frequency of the particular signal source of interest. The coded survey signal is emitted at preselected time intervals, as discussed below in further detail. Its most significant feature lies in its code being unique to a particular signal source. Its transmission, reception and subsequent playback by a speaker characterize a receiver as being tuned to that particular signal source. More specifically, the code can identify the TV channel. Programming and/or commercials broadcast by the TV channel can be determined by combining the TV channel identity with time stamp information. Alternatively, the code can identify a particular program or commercial. This makes the identification possible independent of a time factor, such as when the program is being replayed by a VCR. The words "transmit" and "broadcast" as used herein refer generically to all methods for providing a signal to a receiver of a TV set or a radio set for reproduction by video and/or sound to the individual. For example, transmitter 9 broadcasts its signal over the airwaves in a standard fashion. These signals are picked up by a conventional receiver 10 having antenna 11, tuner/amplifier 12 and speaker 16. If the tuner/amplifier 12 is tuned to the signal source of interest, then the signals broadcast by transmitter 9 will be reproduced by the speaker 16.

Up to this point, the description of receiver 10 has involved only well known components in widespread use. To implement the objects of the invention, further circuitry is required. The further circuitry will now be described as part of receiver 10 in the sense that it is in

the same enclosure (not shown) and in close proximity to speaker 16.

Acoustic sensor 18 is placed at speaker 16. The acoustic sensor 18 picks up vibrations of the speaker either by direct contact or through a small air gap. More specifically, acoustic sensor 18 can be mounted on speaker 16 to directly sense such vibrations. Alternatively, acoustic sensor 18 can be positioned very close to speaker 16, but not in contact with it, to detect pressure waves created in the air gap therebetween. In both cases, acoustic sensor 18 will be responsive to pressure waves generated by vibrations of speaker 16 in response to the survey signal even though the amplitude, or volume, of the transmitted survey signal is set to be low so as to ensure that it will not be heard. Thus, the amplitude of the survey signal is controlled so that when reproduced by the speaker 16, the volume is at a level low enough and/or the frequency is such that it cannot possibly be heard by a human being at any appreciable distance beyond the enclosure. The term "appreciable distance" applies to approximately one foot from the enclosure.

Acoustic sensor 18 can be of a type which reproduces all vibrations it senses from speaker 16, including those due to a programming signal, and produces a corresponding electrical signal. However, for purposes of the survey, only the coded survey signal is significant. Therefore, the electrical output of acoustic sensor 18 is passed through code identifier 20. For example, this component can be a notch filter to monitor a narrow band of frequencies restricted for use by the survey signal, or it can be a comparator which compares, in analog or digital form, the output of acoustic sensor 18 against a preselected reference signal. Code identifier 20 blocks passage of signals to its output unless its input signal matches with a preselected reference signal. When the coded survey signal is so matched, it is provided to signal converter 22. This circuit processes the signal at the output of acoustic sensor 18 to produce a non-acoustic signal for transmission by transmitter 24. The output of transmitter 24 can be, for example, electrical in which case signal converter 22 need do none or just minimal conversion because it receives what is already an electrical signal from code identifier 20. However, if transmitter 24 is optical or otherwise, then a suitable conversion is required. Such conversion circuits are well known in the art and, therefore, details thereof are not deemed necessary.

A variation of the above combines components 18 and 20 into one. More specifically, acoustic sensor 18 can be designed so as to respond only to a specific preselected code. For example, the acoustic sensor 18 can be designed to reproduce only vibrations which are within a certain narrow band of frequencies. This feature can be used to reproduce only the coded survey signal. With this embodiment, the output signal of acoustic sensor 18/code identifier 20 is acoustic rather than electrical. Therefore, signal converter 22 must be of the type

that converts such an acoustic signal at its input to one suitable for transmitter 24, which, for example, is electrical.

Briefly, the above-described circuitry of receiver 10 has converted the acoustic output of the survey signal from speaker 16 to a non-acoustic signal which is emitted from the enclosure (not shown) by transmitter 24. This is accomplished while maintaining the volume of the acoustic survey signal reproduced by speaker 16 at such a low level that it can be detected by acoustic sensor 18 positioned at speaker 16, but not much, if at all, beyond the enclosure. Therefore, the advantages of using a transmitted survey signal in the audible range is retained while distractions and annoyance to the monitored individual at the receiver end are avoided.

A portable signal detector 26 is shown in the drawing as including a code detector 28. Code detector 28 includes a device for responding to the signal emitted by transmitter 24 as well as circuitry for processing the detected signal. More specifically, if transmitter 24 generates an electrical signal (as opposed to another type of signal discussed below), that electrical signal is compared by the circuitry in code detector 28 against a preselected code or codes related to the survey of interest. If the received code matches a stored code, then code detector 28 provides an output signal to memory 30 which stores it as an indication that an incidence of the individual being tuned to a given signal source of interest has been detected. Optionally, a date stamp can be provided by also storing the output of a time circuit 32 in memory 30 together with this incidence signal so that not only the incidence is recorded, but also the time when it occurred. The subject matter of USP 4,718,106 is hereby incorporated by reference in connection with the circuitry and operation of code detector 28, memory 30 and time circuit 32 (respectively identified in such patent as detection circuit 11, memory 13 and time circuit 15).

Portable signal detector unit 26 can be accommodated in any small article of clothing which a person normally wears. For example, a male test subject might be given a wristwatch into which the various components 28, 30 and 32 have been installed. Timer circuit 32 is, of course, an inherent part of the watch. Many electronic watches have been developed which include a memory. Alarm-type watches include a tone producing transducer. This transducer can be replaced with a microphone to detect rather than generate acoustic signals. The remaining circuitry is implementable on a small scale and can readily be inserted into the conventional watch. For a female, the circuitry for portable signal detector unit 26 can be inserted in a bracelet, a decorative pin, or a necklace pendant.

The information stored in memory 30 can be retrieved in one of several ways. For example, the portable signal detector unit 26 can be physically collected at, say, monthly intervals and taken to a central office. The contents of memory 30 are then dumped into another

suitable memory in the central office from where it can be sorted, processed and analyzed as needed. In the alternative, unit 26 (say, a watch) could be placed nightly into a docking station (not shown) which is accessible by a phone line from the central office. The unit 26 can then be accessed by the central station to retrieve the stored data and carry out other operations, such as re-setting the memory.

Information obtained in the above-described manner will indicate to what extent the test subjects were tuned to the particular TV channel or radio station of interest. Only a passive wearing of the article is required. If unit 26 picks up signals from receiver 10, this means that the test subject is close to the receiver and is likely to be listening to the radio or watching television. No deliberate action whatsoever on the part of any individual acting as a test subject is required in order to record the event. Moreover, no skewing of the test results can occur due to any suggestions because these individuals need not be informed about the purpose of the test. They are merely given the article of clothing and are asked to wear it. No more needs to be said. Consequently, the test is completely accurate in terms of fully recording one's radio listening and/or television watching habits, and the test is conducted under natural, real-life conditions.

This technique can also provide valuable information about the type of person listening in. It lends itself to careful selection of the test subjects in terms of, for example, income, education, family size, etc. Information available about such test subject can be combined with the stored tuning habits information so that the resulting data can be analyzed together and refined into various categories of listeners.

If the time of day is recorded when a stored signal is generated, an analysis can be made for the benefit of the advertiser. That time can be correlated against the time when a given commercial was broadcast. Statistics can, therefore, be provided regarding the size of the audience to which the commercial was exposed. Such time information is also valuable to the broadcasters because it reveals the popularity of the shows put on the air by that station. This information can be used to set advertising rates as well as to rearrange the programming as necessary.

As has been mentioned above, the surveying technique is to some extent vulnerable to fraud. For example, a transmitter can be set up in a heavily trafficked area which will transmit the survey signal. All individuals who are participating in the survey that pass within range of this bogus transmitter will register an incidence even though they are not tuned to the registered signal source. In order to avoid such an occurrence, receiver 10 can be provided with a local identification ("ID") code generator 34. It is shown as a box delineated by broken lines which indicates that inclusion of generator 34 is optional. Each transmitter 24 is assigned a unique ID code. This code is added by transmitter 24 to the coded

survey signal provided to transmitter 24 by signal converter 22. The ID code can be positioned before or after the coded survey signal as a matter of design choice. If a generator 34 is used, then transmitter 24 must be suitably revised to include circuitry for combining the two coded signals. The specific circuit implementation is well within the knowledge and capacity of one ordinarily skilled in the art and, therefore, no details are deemed necessary.

Code detector 28 must also be revised to be capable of identifying the local ID codes, and memory 30 must be able commensurately to store the local ID code along with its associated coded survey signal.

Several advantages are gained from use of generator 34. First, if the bogus transmitter does not produce an ID code, then all incidences stored in memory 30 without an associated local ID code are simply discarded. Also, the central station which processes all, or at least much, of the data from individuals participating in the survey can be readily programmed to output the number of devices associated with a particular ID code. Normally, each local ID code should appear in data collected from only a relatively few devices, namely from members of the household and its visitors. However, a bogus transmitter will produce readings in a significantly higher number of devices. Thus, all data associated with a local ID code which appears on an abnormally high number of devices will be discarded. This approach will insure the integrity of the survey results.

An additional advantage stemming from the use of generator 34 is the capacity to gather additional useful information on the behavior of the individuals participating in the survey. More specifically, each TV set and radio in the house is assigned its own unique ID code. Therefore, from the detected ID code it is possible to know where the individual was when the survey signal was detected. A fine tuning of the survey results is feasible based, for example, on a rating of the level of attention and potential for recall related to whether the living room or bedroom was the site.

As is readily apparent from the above, the present invention relies on having a speaker which reproduces the survey signal, albeit at a low volume. However, how will the invention handle a situation where the monitored individual is exposed to the signal source, but without resort to a speaker? For example, a personal receiver, such as the Walkman type, has no speaker and, instead, reproduces sound only via headphones. Another such situation is when the monitored individual uses the headphone input on the radio or TV set to listen with headphones. When a headphone plug is inserted into the headphone jack, the audio signal is blocked from the speaker. The solution offered by the present invention is shown in Fig. 2.

More specifically, receiver 40 is provided with a conventional headphone jack 42. Normally, plug 44 of headphones 46 would be inserted into jack 42 to activate the headphones. Receiver 40 is a conventional one which

includes an antenna, tuner, and amplifier. Headphones 46, plug 44 and jack 42 are also all conventional. In accordance with the present invention, conversion unit 50 is provided which has a plug 52 at one end and jack 54 at the other end. Plug 52 is connected into jack 42, and plug 44 is connected into jack 54. With this arrangement, the signal from receiver 40 is routed to headphones 46 via unit 50.

Conversion unit 50 includes filter 56 to separate the survey signal from the programming signal. The term "filter" is used generically to refer to any way of separating the survey signal from the programming signal. In analog circuitry, the term can refer to an actual filter. In digital circuitry, the separation can be based on digit position, digit sequences, etc. Such signal separation arrangements depend on the transmission scheme used, and are well known to anyone ordinarily skilled in the art. Survey signal circuit 58 receives the separated survey signal from filter 56 and does any necessary processing to ensure that it is accurately reproduced. The separated programming signal is routed to programming signal circuit 60 which does any necessary processing to ensure that the programming signal is accurately reproduced. Only the programming signal is provided to jack 54 which routes it to headphones 46. However, the survey signal is input to transmitter 62 which can be the same as transmitter 24, described above, in terms of radiating the survey signal, which is non-acoustic, for detection by code detector 28 worn by the monitored individual.

Care is taken in the design so that the non-acoustic signal emitted by transmitter 62 is at such a low amplitude so as to radiate for a relatively small distance which corresponds to, for a Walkman unit, only three feet. This distance is adequate when one considers that transmitter 62 is connected to the Walkman unit which is carried by hand or in a belt, and the monitoring device is on the arm (i.e. a watch). Setting such a short distance will not work if unit 50 is connected to a TV set, for example. Typically, wire 64 for such headphones is longer than for a Walkman unit because the monitored individual sits further away from the TV set than the distance from a Walkman unit to the listener's arm. Thus, the unit 50 is provided with a single pole, double throw switch 66 with two contacts A and B. When contact A is engaged by the pole, a control signal is sent on line 68 which causes transmitter 62 to radiate a distance of three feet, as explained above. If unit 50 is used with a TV set, switch 66 is actuated to the B position which produces a control signal on line 68 that causes transmitter 62 to radiate the survey signal for, say, 15 feet. However, this causes a problem because, at this distance, the survey signal might be detected by the device worn by another monitored individual present in the vicinity. Such a reading would obviously be a false one since the headphones are worn by only a single individual. This problem can be handled by the following signal processing. Unit 50 is provided with local ID code generator 70 which is like

generator 34 described above. When processing at the central station determines that this ID code appears on more than one device at approximately the same time (a fact known from the time stamp as described above), only one of the device readings is recognized as an incidence.

It should be apparent that although a preferred embodiment of the invention has been described above, various modifications can readily be made thereto. All such modifications are intended to be included within the scope of the invention as defined by the following claims.

15 Claims

1. A receiver unit for use in a system for surveying an audience to determine whether a person is tuned to a given signal source (1) such as a radio station or television channel, arranged to transmit a combined signal that combines both a programming signal and a survey signal characteristic of said signal source (1), said programming signal and said survey signal being in a frequency range to be audibly reproduced by a speaker (16) in a receiver unit (11,12,16), the receiver unit comprising:

receiving means (11,12,16) for receiving the combined signal and including a speaker (16) for reproducing therefrom the survey signal as an acoustic signal,

the receiver unit being characterised in that said acoustic signal is such that it cannot be heard at an appreciable distance from the speaker (16), and further comprising:

conversion means (18,20,22) for converting said acoustic survey signal produced by said speaker (16) to a non-acoustic converted signal;

means (24) for transmitting said converted signal to a signal detector means (28); and said signal detector means (28) being effective to detect said transmitted converted signal.

2. A unit according to claim 1, including said signal detector means (28) being effective to identify the signal source (1) dependent on said transmitted converted signal.
3. A unit according to either of the preceding claims, wherein said conversion means (18,20,22) comprises an acoustic sensor (18) positioned at said speaker (16) effective to produce a signal corresponding to the acoustic signal from said speaker (16).
4. A unit according to claim 3, wherein said acoustic sensor (18) is spaced by an air gap from said speak-

- er (16).
5. A unit according to claim 3, wherein said acoustic sensor (18) is mounted on said speaker (16).
 6. A unit according to any one of claims 2 to 5, wherein the conversion means (18,20,22) comprises means (20) for identifying the presence of a signal corresponding to said survey signal in an output of said acoustic sensor (18).
 7. A unit according to any one of the preceding claims, further comprising:
 - an identification code generator (34) for producing an ID signal unique to said converted signal transmitting means (24); and
 - means for combining said ID signal with said converted signal for input to said converted signal transmitting means (24).
 8. A system for surveying an audience to determine whether a person is tuned to a given signal source (1), such as a radio station or a television channel arranged to transmit a combined signal that combines both a programming signal and a survey signal characteristic of said signal source (1), said programming signal and said survey signal being in a frequency range to be audibly reproduced by a speaker (16) in a receiver unit (11,12,16), including a receiver unit according to any one of the preceding claims, combining means (7) for combining the programming signal and the survey signal and transmitting means (9) for transmitting the program signal and the survey signal as the combined signal.
 9. A system according to claim 8, wherein said transmitting means (9) is arranged to transmit said survey signal at preset intervals.
 10. A method for surveying an audience to determine whether a person is tuned to a given signal source (1), such as radio station or television channel, which is transmitting a combined signal that combines both a programming signal and a survey signal characteristic of said signal source (1), said programming signal and said survey signal being in a frequency range to be audibly reproduced by a speaker (16) in a receiver unit (11,12,16), the method comprising the steps of:

receiving (11,12,16) the combined signal and reproducing therefrom the survey signal as an acoustic signal with a speaker (16), the method being characterized by the acoustic signal being such that it cannot be heard at an appreciable distance from the speaker (16), and by including the further steps of:

- converting said acoustic survey signal produced by said speaker (16) to a non-acoustic converted signal;
 - transmitting said converted signal; and
 - detecting said transmitted converted signal.
11. A method according to claim 10, including the step of identifying the signal source (1) dependent on said transmitted converted signal.
 12. A method according to claim 10 or 11, further comprising the steps of combining (7) the programming signal and the survey signal to generate the combined signal, and transmitting (9) the combined signal.
 13. A method according to claim 12, wherein said transmitting step comprises transmitting said survey signal at preset intervals.
 14. A receiver unit for use in a system for surveying an audience to determine whether a person listening with headphones is tuned to a given signal source such as a radio station or a television channel, which is arranged to transmit a combined signal combining programming signal along with a survey signal characteristic of the signal source, the programming signal and the survey signal being in a frequency range to be audibly reproduced by a speaker and/or headphones coupled to a receiver, the receiver unit comprising:
 - receiving means for receiving said transmitted combined signal and providing the combined signal at a jack for input to the headphones (46);
 - the receiver unit being characterised in including:
 - a conversion unit having a jack (54) and a plug (44), said plug being received in the jack of the receiving means, and said plug of the conversion unit being adapted to receive a plug of the headphones,
 - wherein said conversion unit (50) includes means for reproducing said survey signal from said combined signal to generate an output signal;
 - means (62) for transmitting a signal corresponding to said output signal; and
 - means for detecting said transmitted signal.
 15. A receiver unit according to claim 14, wherein said means for detecting said transmitted output signal is arranged to detect said transmitted output signal as being indicative of the signal source.

Patentansprüche

1. Empfängerseinheit zur Verwendung in einem System zum Ermitteln einer Einschaltquote zum Bestimmen, ob eine Person auf eine gegebene Signalquelle (1) wie eine Radiostation oder einen Fernsehkanal abgestimmt hat, ausgebildet zum Übermitteln eines kombinierten Signals, das sowohl ein Programmsignal als auch eine Überwachungssignalcharakteristik der Signalquelle (1) kombiniert, wobei das Programmsignal, und das Überwachungssignal in einem Frequenzbereich liegen, der über einen Lautsprecher (16) in einer Empfängerseinheit (11, 12, 16) hörbar wiederzugeben ist, wobei die Empfängerseinheit aufweist:

Empfangsmittel (11, 12, 16) zum Empfangen des kombinierten Signals und mit einem Lautsprecher (16) zum Wiedergeben des Überwachungssignals als Akustiksignal, wobei die Empfängerseinheit

dadurch gekennzeichnet ist, daß das Akustiksignal derart ausgebildet ist, daß es in einem geeigneten Abstand von dem Lautsprecher (16) nicht gehört werden kann, und mit weiterhin:

Wandlernmittel (18, 20, 22) zum Wandeln des akustischen Überwachungssignals, das durch den Lautsprecher (16) erzeugt wird, in ein nichtakustisches gewandeltes Signal, Mitteln (24) zum Übermitteln des gewandelten Signals an ein Signaldetektormittel (28) und wobei das Signaldetektormittel (28) wirksam ist, um das übermittelte gewandelte Signal zu detektieren.

2. Einheit nach Anspruch 1,

wobei das Signaldetektormittel (28) wirksam ist, um die Signalquelle (1) abhängig von dem übermittelten gewandelten Signal zu identifizieren.

3. Einheit nach einem der vorstehenden Ansprüche,

wobei das Wandlernmittel (18, 20, 22) einen akustischen Sensor (18) aufweist, der an dem Lautsprecher (16) positioniert ist und wirksam ist, um ein Signal zu erzeugen, das dem akustischen Signal von dem Lautsprecher (16) entspricht.

4. Einheit nach Anspruch 3,

wobei der akustische Sensor (18) über einen Luftspalt von dem Lautsprecher (16) beabstandet ist.

5. Einheit nach Anspruch 3,

wobei der akustische Sensor (18) auf dem Lautsprecher (16) montiert ist.

6. Einheit nach einem der Ansprüche 2 bis 5,

wobei die Wandlernmittel (18, 20, 22) Mittel (20) aufweisen zum Identifizieren der Anwesenheit eines Signals, das dem Überwachungssignal entspricht, am Ausgang des akustischen Sensors (18).

7. Einheit nach einem der vorstehenden Ansprüche mit weiterhin:

einem Identifikationscodegenerator (34) zur Erzeugung eines ID-Signals, das eindeutig für die Übermittlungsmittel (24) des gewandelten Signals ist, und Mitteln zum Kombinieren des ID-Signals und des gewandelten Signals zur Eingabe an die Übermittlungsmittel (24) für das gewandelte Signal.

8. System zum Überwachen einer Einschaltquote zur Bestimmung, ob eine Person auf eine gegebene Signalquelle (1) wie eine Radiostation oder einen Fernsehkanal abgestimmt hat, zur Übermittlung eines kombinierten Signals, das sowohl ein Programmsignal als auch eine Überwachungssignalcharakteristik der Signalquelle (1) kombiniert, wobei das Programmsignal und das Überwachungssignal in einem Frequenzbereich zum hörbaren Wiedergeben durch einen Lautsprecher (60) in einer Empfangseinheit (11, 12, 16) liegen, mit einer Empfängerseinheit gemäß einem der vorstehenden Ansprüche, Kombinationsmitteln (7) zum Kombinieren des Programmsignals und des Überwachungssignals und Übermittlungsmitteln (9) zum Übermitteln des Programmsignals und des Überwachungssignals als das kombinierte Signal.

9. System nach Anspruch 8,

wobei die Übermittlungsmittel (9) zur Übermittlung des Überwachungssignals zu vorgegebenen Intervallen ausgebildet sind.

10. Verfahren zum Überwachen einer Einschaltquote zur Bestimmung, ob eine Person auf eine gegebene Signalquelle (1) wie eine Radiostation oder einen Fernsehkanal abgestimmt hat, die ein kombiniertes Signal übermittelt, das sowohl ein Programmsignal als auch eine Überwachungssignalcharakteristik der Signalquelle (1) kombiniert, wobei das Programmsignal und das Überwachungssignal in einem Frequenzbereich liegen, der hörbar durch ei-

nen Lautsprecher (16) in einer Empfängereinheit (11, 12, 16) wiederzugeben ist, wobei das Verfahren die Schritte aufweist:

Empfangen (11, 12, 16) des kombinierten Signals und Reproduzieren daraus des Überwachungssignals als ein akustisches Signal mit einem Lautsprecher (16), wobei das Verfahren dadurch gekennzeichnet ist, daß das akustische Signal derart ausgebildet ist, daß es in einem angemessenen Abstand von dem Lautsprecher (16) nicht hörbar ist, und mit weiterhin den Schritten:
Wandeln des durch den Lautsprecher (16) erzeugten akustischen Überwachungssignals in ein nichtakustisches gewandeltes Signal, Übermitteln des gewandelten Signals und Erfassen des übermittelten gewandelten Signals.

11. Verfahren nach Anspruch 10,

mit einem Schritt zur Identifizierung der Signalquelle (1) abhängig von dem übermittelten gewandelten Signal.

12. Verfahren nach einem der Ansprüche 10 oder 11,

mit weiterhin den Schritten der Kombinierung (7) des Programmsignals und des Überwachungssignals zur Erzeugung des kombinierten Signals und der Übermittlung (9) des kombinierten Signals.

13. Verfahren nach Anspruch 12,

wobei der Übermittlungsschritt die Übermittlung des Überwachungssignals in voreingestellten Intervallen aufweist.

14. Empfängereinheit zur Verwendung in einem System zur Überwachung einer Einschaltquote zur Feststellung, ob eine Person, die über Kopfhörer hört, auf eine gegebene Signalquelle wie eine Radiostation oder einen Fernsehkanal abgestimmt hat, die zur Übermittlung eines kombinierten Signals ausgebildet ist, das ein Programmsignal zusammen mit einer Überwachungssignalcharakteristik der Signalquelle kombiniert, wobei das Programmsignal und das Überwachungssignal in einem Frequenzbereich liegen, der durch einen Lautsprecher und/oder über Kopfhörer, die mit dem Empfänger verbunden sind, hörbar wiederzugeben ist, wobei die Empfängereinheit aufweist:

Empfangsmittel zum Empfangen des übermittelten kombinierten Signals und Liefern des kombinierten Signals an eine Buchse zur Ein-

gabe an die Kopfhörer (46),

wobei die Empfängereinheit gekennzeichnet ist durch:

eine Wandlereinheit mit einer Buchse (54) und einem Stecker (44), wobei der Stecker in der Buchse der Empfangsmittel aufgenommen ist und die Buchse der Wandlereinheit zur Aufnahme eines Steckers der Kopfhörer ausgebildet ist, wobei die Wandlereinheit (50) Mittel aufweist zum Wiedergeben des Überwachungssignals aus dem kombinierten Signal zur Erzeugung eines Ausgabesignals, Mittel (62) zur Übermittlung eines Signals entsprechend dem Ausgabesignal und Mittel zur Erfassung des übermittelten Signals.

15. Empfängereinheit nach Anspruch 14,

wobei die Mittel zur Erfassung des übermittelten Ausgabesignals ausgebildet sind, um das übermittelte Ausgabesignal als Anzeichen für die Signalquelle zu erfassen.

25 Revendications

1. Unité de récepteur pour une utilisation dans un système pour surveiller un auditoire afin de déterminer si oui ou non une personne est accordée sur une source de signal donnée (1) telle qu'une station de radio ou qu'un canal de télévision, agencée pour émettre un signal combiné qui combine à la fois un signal de programmation et une caractéristique de signal de surveillance de ladite source de signal (1), ledit signal de programmation et ledit signal de surveillance étant dans une plage de fréquences leur permettant d'être reproduits de façon audible par un haut-parleur (16) dans une unité de récepteur (11, 12, 16), l'unité de récepteur comprenant :

un moyen de réception (11, 12, 16) pour recevoir le signal combiné et incluant un haut-parleur (16) pour reproduire à partir de celui-ci le signal de surveillance en tant que signal acoustique,

l'unité de récepteur étant caractérisée en ce que ledit signal acoustique est tel qu'il ne peut pas être entendu à une distance appréciable du haut-parleur (16), et comprenant en outre :

un moyen de conversion (18, 20, 22) pour convertir ledit signal de surveillance acoustique produit par ledit haut-parleur (16) selon un signal converti non acoustique ;

un moyen (24) pour émettre ledit signal converti sur un moyen de détecteur de signal (28) ; et ledit moyen de détecteur de signal (28) étant efficace pour détecter ledit signal converti émis.

2. Unité selon la revendication 1, incluant ledit moyen de détecteur de signal (28) qui est efficace pour identifier la source de signal (1) en fonction dudit signal converti émis.

3. Unité selon l'une quelconque des revendications précédentes, dans laquelle ledit moyen de conversion (18, 20, 22) comprend un capteur acoustique (18) positionné au niveau dudit haut-parleur (16) efficace pour produire un signal correspondant au signal acoustique provenant dudit haut-parleur (16).

4. Unité selon la revendication 3, dans laquelle ledit capteur acoustique (18) est espacé par un espace d'air dudit haut-parleur (16).

5. Unité selon la revendication 3, dans laquelle ledit capteur acoustique (18) est monté sur ledit haut-parleur (16).

6. Unité selon l'une quelconque des revendications 2 à 5, dans laquelle le moyen de conversion (18, 20, 22) comprend un moyen (20) pour identifier la présence d'un signal correspondant audit signal de surveillance dans une sortie dudit capteur acoustique (18).

7. Unité selon l'une quelconque des revendications précédentes, comprenant en outre :

un générateur de code d'identification (34) pour produire un signal ID unique pour ledit moyen d'émission de signal converti (24) ; et
un moyen pour combiner ledit signal ID avec ledit signal converti pour une entrée sur ledit moyen d'émission de signal converti (24).

8. Système pour surveiller un auditoire afin de déterminer si oui ou non une personne est accordée sur une source de signal donnée (1) telle qu'une station de radio ou qu'un canal de télévision, agencée pour émettre un signal combiné qui combine à la fois un signal de programmation et une caractéristique de signal de surveillance de ladite source de signal (1), ledit signal de programmation et ledit signal de surveillance étant dans une plage de fréquences leur permettant d'être reproduits de façon audible par un haut-parleur (16) dans une unité de récepteur (11, 12, 16), incluant une unité de récepteur selon l'une quelconque des revendications précédentes, un moyen de combinaison (7) pour combiner le signal de programmation et le signal de surveillance et un moyen d'émission (9) pour émettre le signal de programmation et le signal de surveillance en tant que signal combiné.

9. Système selon la revendication 8, dans lequel ledit moyen d'émission (9) est agencé pour émettre ledit

signal de surveillance selon des intervalles pré-établis.

10. Procédé pour surveiller un auditoire afin de déterminer si oui ou non une personne est accordée sur une source de signal donnée (1) telle qu'une station de radio ou qu'un canal de télévision qui est en train d'émettre un signal combiné qui combine à la fois un signal de programmation et une caractéristique de signal de surveillance de ladite source de signal (1), ledit signal de programmation et ledit signal de surveillance étant dans une plage de fréquences leur permettant d'être reproduits de façon audible par un haut-parleur (16) dans une unité de récepteur (11, 12, 16), le procédé comprenant les étapes de :

réception (11, 12, 16) du signal combiné et reproduction à partir de celui-ci du signal de surveillance en tant que signal acoustique à l'aide d'un haut-parleur (16),
le procédé étant caractérisé par le fait que le signal acoustique est tel qu'il ne peut pas être entendu à une distance appréciable du haut-parleur (16) et par le fait qu'il inclut les étapes supplémentaires de :
conversion dudit signal de surveillance acoustique produit par ledit haut-parleur (16) selon un signal converti non acoustique ;
émission dudit signal converti ; et
détection dudit signal converti émis.

11. Procédé selon la revendication 10, incluant l'étape d'identification de la source de signal (1) en fonction dudit signal converti émis.

12. Procédé selon la revendication 10 ou 11, comprenant en outre les étapes de combinaison (7) du signal de programmation et du signal de surveillance afin de générer le signal combiné, et d'émission (9) du signal combiné.

13. Procédé selon la revendication 12, dans lequel ladite étape d'émission comprend l'émission dudit signal de surveillance selon des intervalles pré-établis.

14. Unité de récepteur pour une utilisation dans un système pour surveiller un auditoire afin de déterminer si oui ou non une personne qui écoute avec des écouteurs est accordée sur une source de signal donnée telle qu'une station de radio ou qu'un canal de télévision, agencée pour émettre un signal combiné qui combine un signal de programmation et une caractéristique de signal de surveillance de la source de signal, le signal de programmation et le signal de surveillance étant dans une plage de fréquences leur permettant d'être reproduits de façon

audible par un haut-parleur et/ou des écouteurs couplés à un récepteur, l'unité de récepteur comprenant :

un moyen de réception pour recevoir ledit signal combiné émis et pour appliquer le signal combiné au niveau d'un jack en vue d'une entrée sur les écouteurs (46),
l'unité de récepteur étant caractérisée en ce qu'elle inclut :
une unité de conversion comportant un jack (54) et une prise (44), ladite prise étant reçue dans le jack du moyen de réception et ladite prise de l'unité de conversion étant adaptée pour recevoir une prise des écouteurs,
dans laquelle ladite unité de conversion (50) inclut un moyen pour reproduire le signal de surveillance à partir dudit signal combiné afin de générer un signal de sortie ;
un moyen (62) pour émettre un signal correspondant audit signal de sortie ; et
un moyen pour détecter ledit signal émis.

15. Unité de récepteur selon la revendication 14, dans laquelle ledit moyen pour détecter ledit signal de sortie émis est agencé pour détecter ledit signal de sortie émis comme étant indicatif de la source de signal.

30

35

40

45

50

55

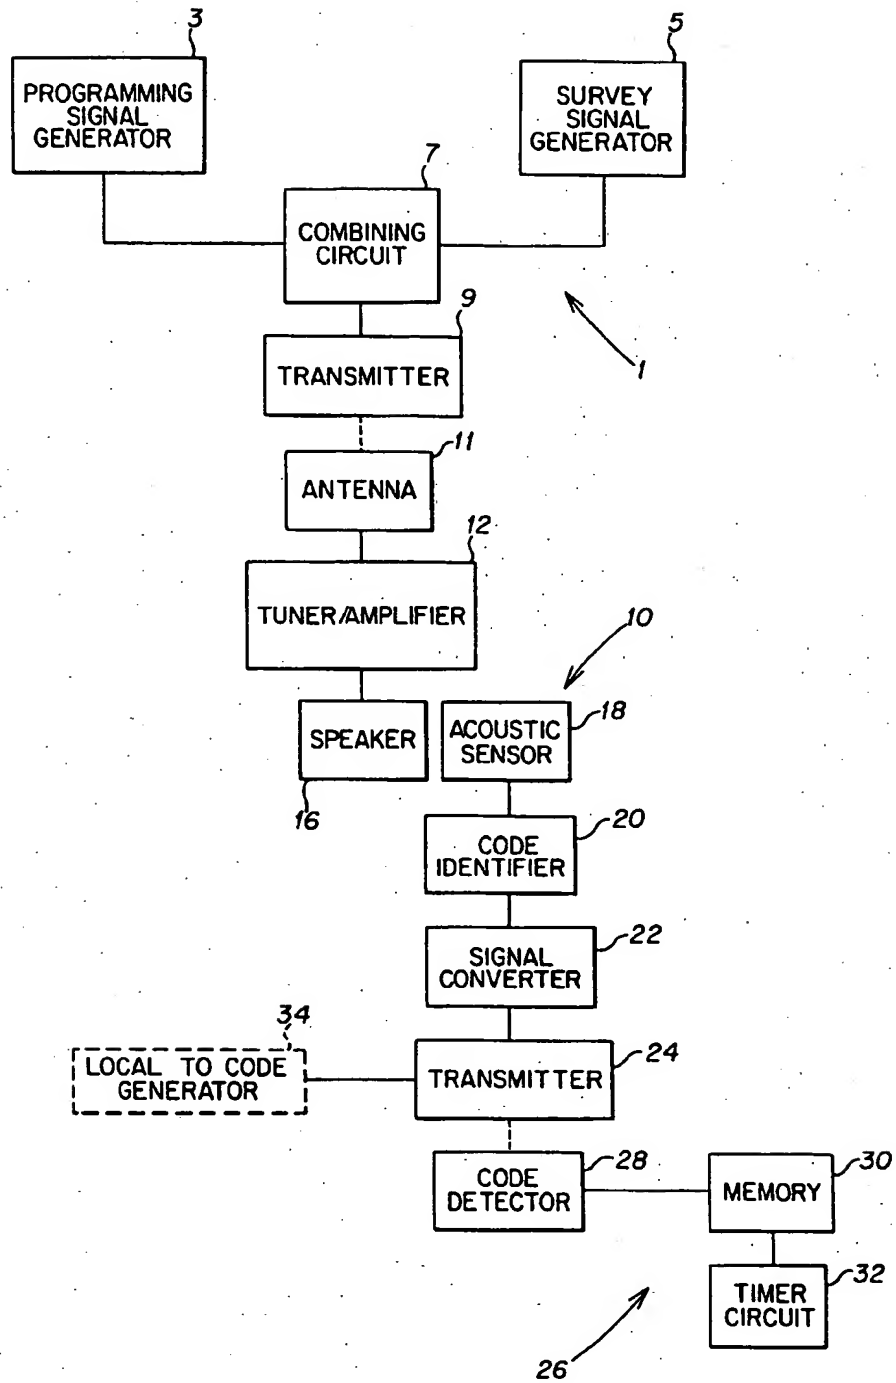


FIG. 1

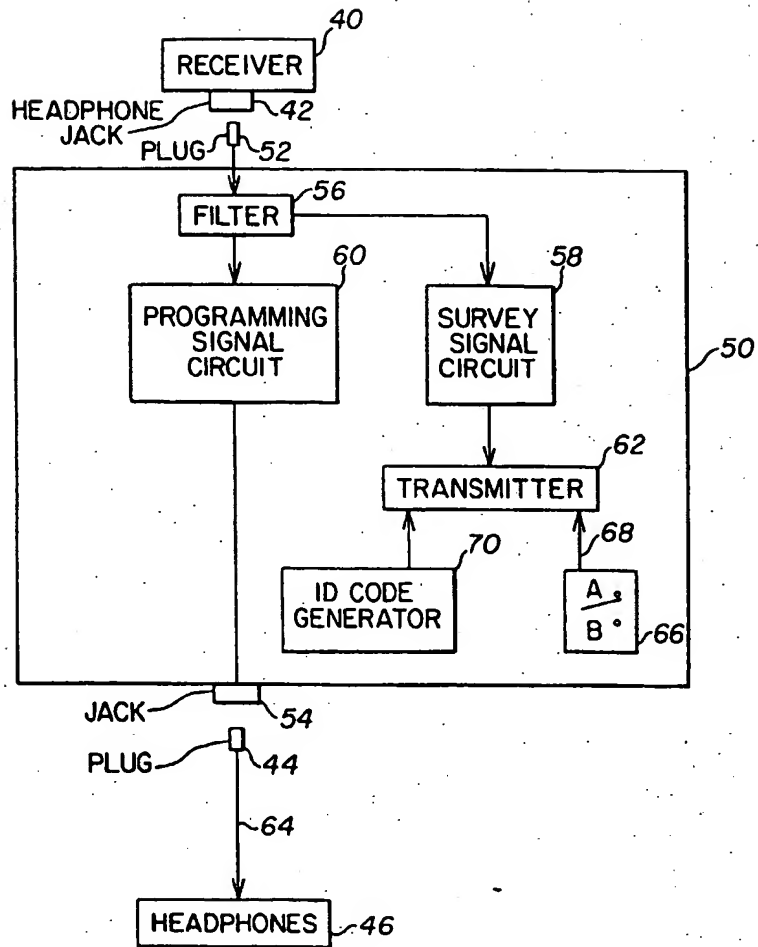


FIG. 2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.